



AIR DRIVE DISTRIBUTOR *included in every seeding element*

- Centesimal tolerances aluminum body
- Exclusive fast opening / closing system
- Incorporated electric engine
- Disc support on bearing
- Rear PTFE disc gasket
- Front dampened PTFE disc gasket
- Inner adjustable plate for seed flow regulation
- Seed selector with micrometric regulation
- Counter seed selector with micrometric regulation
- Interchangeable elements in contact with the disc on springs
- Inner pressurised air pipe for disc cleaning
- Exclusive seed shaking system by vibrations
- 1.5 Lt hopper
- Upper hopper closure
- External transparent disc protection
- Lower interchangeable coulter



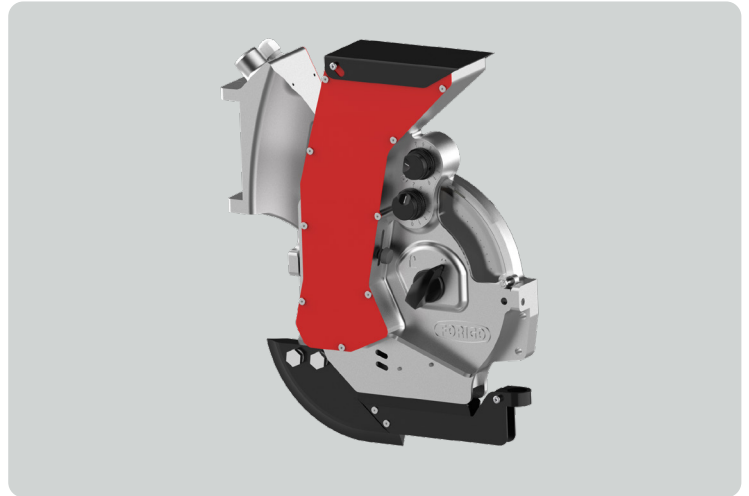

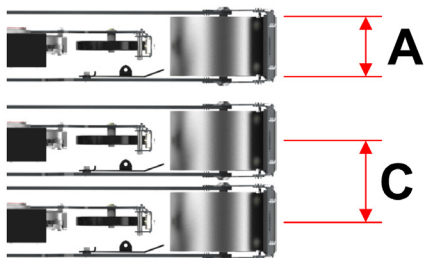

**Element SFJ**

- Parallel link for precise ground following
- Springs on parallelogram for element's loading variation
- Front and rear wheel Ø250 mm with balance movement
- Wheel reversible scraper mounted on springs
- Mechanical seeding depth regulation by crank handle
- Seed covering plate with tilting and pressure regulation
- AIR DRIVE seeding distributor



Model	Wheel width (A)		Minimum distance between seeding units (C)	
	cm	inch	cm	inch
SFJ11	6	2,4	11	4,3
SFJ14	9	3,5	14	5,5
SFJ19	14	5,5	19	7,5

Other accessories

	Name
	Stainless steel wheel
	Mesh wheel
	Flex rubber wheel
	Flex rubber rear wheel with press-fit ring
	Photocell for the control of seeding fall and failures (each)
	Additional seeding disc for pneumatic distributor